


The A-758 Plus Lime Slaker system provides reliable, efficient slaking of various grades of quicklime (CaO) at a substantial savings over other slaking methods. Our paste-type lime slaker produces a higher strength and more reactive paste resulting in more efficient use of lime. The resulting higher strength slurry reduces wasted lime and associated costs, ensuring treatment objectives are efficiently met. For over 40 years, we have pioneered the design and application of paste-type lime slakers. Our recent developments to the lime slaker technology bring new features which extend equipment life, reduce maintenance costs, and improve control and reliability.

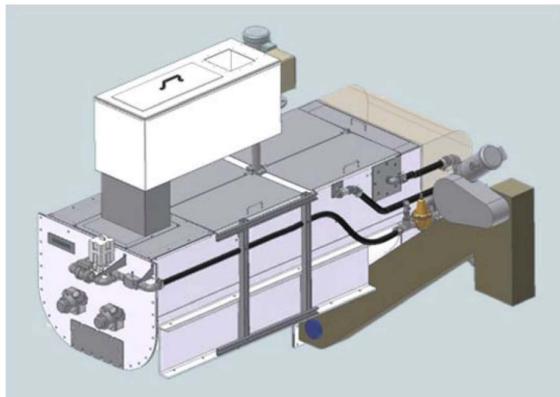

KEY BENEFITS

- More reactive lime slurry improves efficiency, reduces lime costs and ensures treatment objectives are met
- More efficient; external heat source not required
- Reliable performance and robust construction reduce operator attention and lower maintenance costs
- Faster slaking improves responsiveness, making it easier to control over a wider range
- Smaller footprint and flexible configuration make installation simple

FEATURES

Superior Paste-Slaking Process

Utilizing a low water-to-lime ratio (2:1), the A-758 Plus unit slakes lime as a paste which provides a number of benefits over the more traditional 4:1 or slurry slaking process. This includes lower power consumption, faster slaking, a smaller footprint and, most importantly, a more reactive lime slurry solution.

In addition, the A-758 Plus incorporates innovative controls to produce consistent and reliable paste concentrations.

Less Power

The 2:1 paste slaking process generates its own heat from the hydration heat of reaction. This avoids the need and expense of an external heat source, internal heat exchangers, and temperature control systems. Paste slaking combined with slow speed mixing conserves energy by 50% or more compared to other lime slaking systems.

Faster Slaking

Fast slaking is accomplished due to the low water content of the paste. Heat generated by the hydration completes the slaking process in approximately five minutes. This short retention time provides efficient start-stop or batching operation and the ability to make rapid changes

in lime concentration when required. The simplified process also reduces maintenance costs.

Smaller Footprint

Faster slaking is more responsive to changes in demand, easier to control and offers a wider range of operation (20:1 turndown). Faster slaking also accounts for a compact size which saves on valuable floor space that offers installation flexibility.

More Reactive Lime Slurry

The intense heat generated by the 2:1 slaking ratio subjects the quicklime to thorough steam penetration. The resulting internal pressure promotes the fracturing of the quicklime into smaller, more highly reactive particles. This means more surface area for more efficient lime usage to ensure treatment objectives are met confidently and with less waste.

Consistent and Reliable Slaking

The A-758 Plus incorporates automatic adjustment of the slaking water addition by measuring the torque on the paddle mixer shaft. The result is precise and continuous control of paste consistency without the need for operator intervention.

COMPLETE SLAKING SOLUTIONS


Lime slaking systems require more than just the slaker. We offer complete solutions including lime feeding and grit removal technologies which are an integral part of the lime slaking process. Our lime feeding technologies include gravimetric or volumetric belt-type and screw-type systems. Our grit removal technologies include specific gravity classification and screen-type systems.

Complete Slaking Solutions	
Lime Feeding	Gravimetric belt-type
	Volumetric belt-type
	Volumetric screw-type
Lime Slaker	500 lbs/hr
	1000 lbs/hr
	2000 lbs/hr
	4000 lbs/hr
	8000 lbs/hr
Grit Removal	Specific Gravity
	Screen-type


Extending life and reducing maintenance costs result from new and improved engineering design

- Stainless steel construction option prevents corrosion for long life, reducing maintenance costs
- Gear drive eliminated belts, which need to be replaced, reducing maintenance costs
- Bearings and seals upgraded for extended life, reducing maintenance costs
- Large access panel makes clean-out easier ensuring operator safety, reducing maintenance costs
- Corrosion-resistant PVC piping extends life and reduces maintenance costs
- Start-up and shut down sequence includes automatic flush cycle, reducing operator cleaning and maintenance costs

A-758 PLUS LIME SLAKING TUB

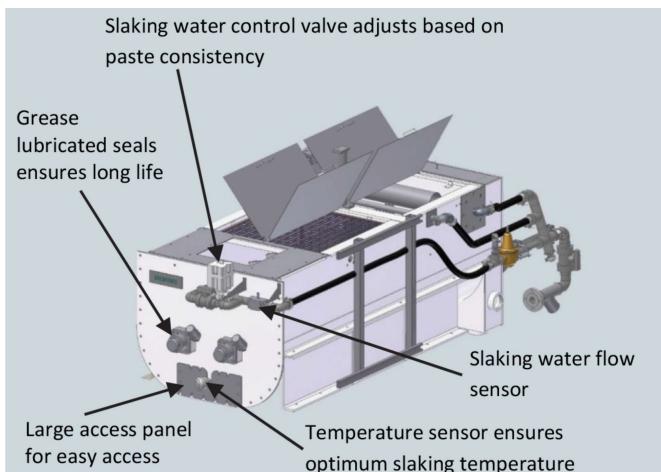


A-758 PLUS LIME SLAKING TUB CUTAWAY

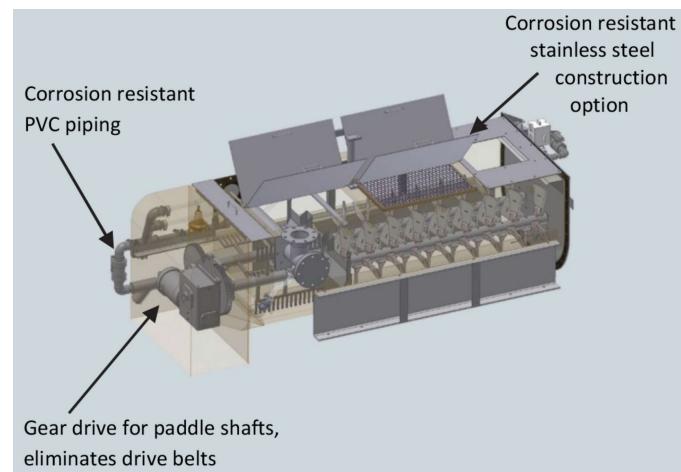

Improved control, reliability

- PLC controls with graphics touch screen operator interface provides a simple, flexible and intelligent operation
- Flow and temperature instrumentation, verifies correct operation
- Innovative paste consistency measurement and control provides reliable and consistent paste concentration

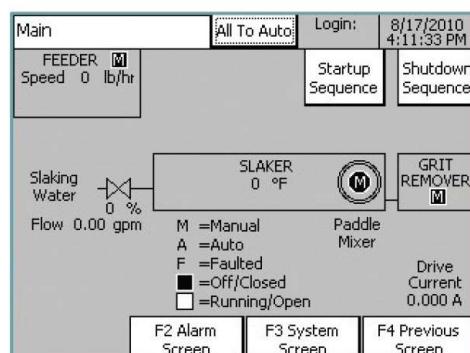

DESIGN AND OPERATION

Water and quicklime (CaO) are fed into the slaker mixing compartment at an approximate 2:1 ratio. The lime is metered by either a gravimetric weigh belt feeder or a volumetric screw or belt-type feeder. Controlling the lime feedrate determines the output of the slaker system. The water flow is automatically controlled based on the desired paste concentration.


In the slaking compartment, two intermeshing paddle shafts, rotating in counter directions, mix the quicklime and water into a paste-type composition, controlled by the torque valve to the 2:1 slaking ratio. Any variation in the paste consistency caused by vapor loss, lime quality or size fluctuations, or changes in the lime feed rate, results in a different torque load on the paddle shafts. This causes the PLC to adjust the water flow to maintain the desired paste consistency.

The paste and entrained inert grit moves forward in a plug-flow fashion. After approximately five minutes, the completely slaked lime paste flows over a weir into the dilution compartment. Here water nozzles direct a cut-off spray to dilute the paste into a lime slurry at an approximate 4:1 concentration. This also releases the grit from the lime paste so that it can be removed. Two sets of rotating rakes keep the lime in suspension and help move the grit to the grit separator.

Dust and steam, generated by the exothermic reaction of the lime and water, are drawn off by an integral, water operated vapor-dust arrester. The steam and dust are condensed and returned to the dilution compartment. Excess steam and water vapor are vented outside of the slaker.

A low water pressure switch in the inlet water piping is designed to stop the lime feeder when the supply pressure falls below the minimum operating requirement. This avoids heat build-up due to insufficient slaking water. The feeder automatically restarts when the pressure is restored.

The paste-type lime slaker is ideally suited for all types of control systems. In a continuous process, slaker operation remains constant. Lime slurry is continuously discharged while the lime feed rate can be varied to account for flow or process variations. Lime can be gravity flow, directly to the point of application without the need for costly slurry handling equipment. For batching applications, the slaker system can be automatically stopped and started. The low water-to-lime ratio ensures a fast start-up to bring the slaker on line quickly. Both long-term (> 8 hours) and short-term (< 8 hours) shutdown modes are operator selectable.

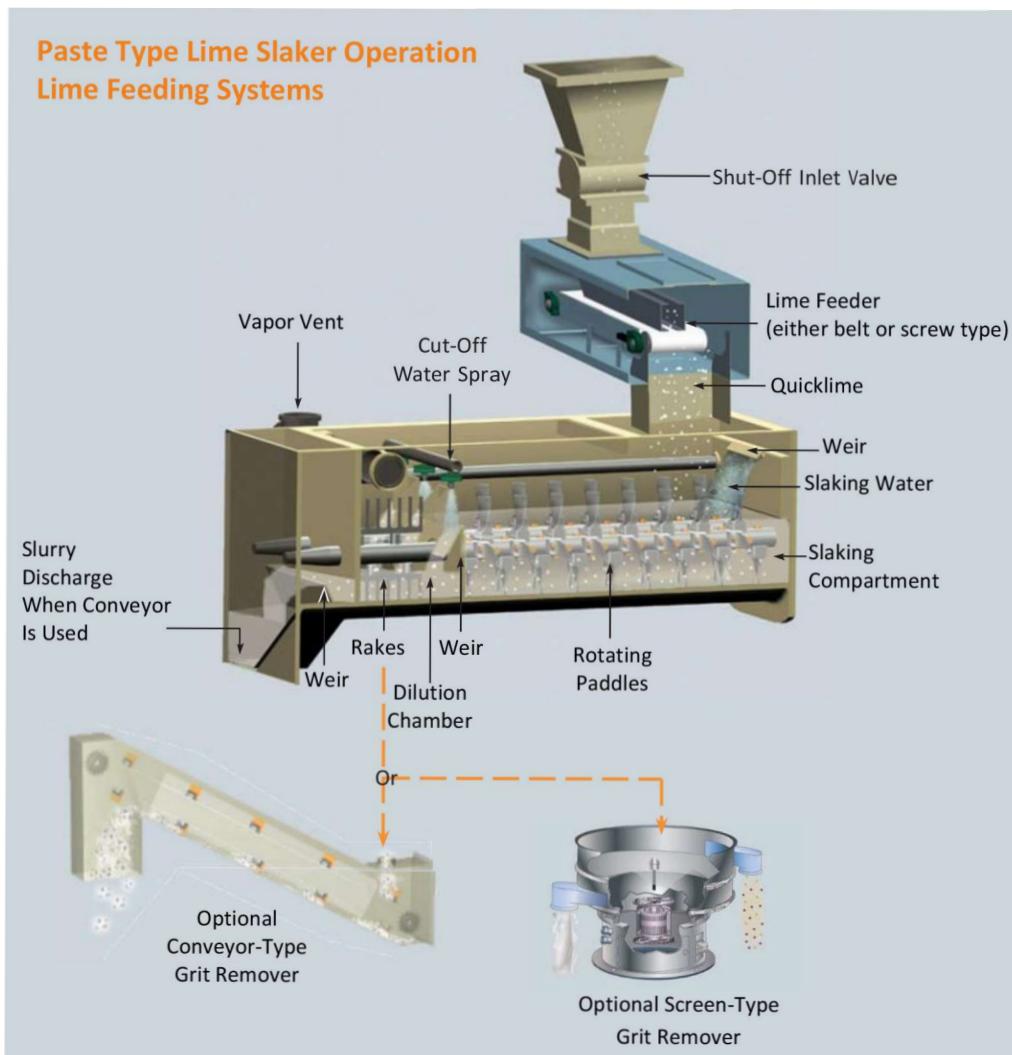

SERIES 31-165 GRAVIMETRIC WEIGHBELT FEEDER

The Series 31-165 microprocessor controlled weighbelt feeder controls the feed rate of dry chemicals with an accuracy as low as 0.25% of set rate. Its accuracy and instantaneous response to feed rate changes and variations in material density provide tight control of chemical usages and minimize waste. The controller can provide information about chemical application rate for record keeping or inventory control.



SERIES 32-215 VOLUMETRIC BELT-TYPE FEEDER

The Series 32-215 belt-type feeder is a simple, high capacity volumetric belt feeder. It gives reliable long term feeding and requires little maintenance. It easily handles materials from fine powder to 1 1/2 inch lumps. Its design and operation is simple and provides reliable feeding at minimum cost.

SERIES 32-300 VOLUMETRIC SCREW-TYPE FEEDER

The Series 32-300 screw-type volumetric feeders are designed for continuous duty in harsh operating environments. They meter dry and semi-dry powders and other freeflowing materials as well as pellets, flakes, chips, and other difficult materials with reliable accuracy and repeatability. The heavy gauge steel construction stands up to the stress of long-running, high-volume bulk operations. Operation and control are simple and direct. There are only five moving parts.



Conveyor-Type

Grit particles are separated from the lime slurry based on their specific gravity. An up-flow of water is introduced into the dilution compartment of the slaker. The heavier grit particles fall through this flow to be subsequently removed by the chain and flight scraper. The operator can adjust the water flow to determine the size and amount of grit that is to be removed. This system removes virtually all grit down to 10 mesh in size and some portion of finer grit down to 40 mesh. Slurry concentrations up to 18% are achievable. Operation is simple and efficient with very low maintenance.



Screen-Type

In this system, grit particles are separated by size through a vibrating screen separator to provide positive grit removal. The lime slurry discharge passes through a 20 mesh screen (40 mesh optional), where grit is removed and delivered to the process or a stabilization tank. Slurry concentrations up to 20% are achievable.



For installations where storage space is a consideration or in applications where excess water is limited in the process, the screen-type grit removal system can be fitted with high velocity spray nozzles to achieve a slurry concentration of 28% at maximum feed rate.

GRIT REMOVAL SYSTEMS

All quicklime (CaO) contains a small amount of inert grit or unslakable material. To protect lime slurry pumps and piping, it is necessary to remove this grit as the slurry exits the slaker. The A-758 Plus lime slaker is available with a choice of two different grit remover technologies: